

Li-Lo

FLAT RAINWATER TANK

The Li-Lo tankseries for shallow excavation!



2 friends



2 spades



1 morning

How do you install a tank?

It's as easy as 1, 2, 3.



80 %* less digging compared with a cylindric cistern.

Save more than 150* wheelbarrow loads of soil!




Li-Lo 3000 l



Low installation depth – so no slope angle required

Excavation approx 7.6 m³ / 268 ft³

Cylindric cistern 3000 L

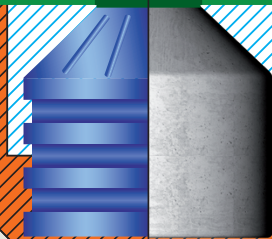

Picture simplified

Excavation approx 49 m³ / 1730 ft³

* Based on a vertical, cylindric cistern with a useable volume of 3000 ltr, a height of 1,90 mtr and a diameter of 2,20 mtr. Calculation of excavation is under consideration of a ditch bottom of 10 cm, a sidewise distance of 50 cm and a slope with 45° gradient according to DIN 4124.


The perfect solution

- ✓ Patented technology!
- ✓ State of the art rain water harvesting technology
- ✓ Amazing German engineered underground tank system
- ✓ Stunning technology with self cleaning filter
- ✓ Simple to install – very low maintenance




Technical data

Measurements/weights	1500 l 450 US-Gal	3000 l 800 US-Gal	5000 l 1350 US-Gal
Order Code	200050	200051	200052
Length [l]	2100 mm (82,6")	2450 mm (49,2")	2890 mm (113,77")
Width [w]	1250 mm (49,2")	2100 mm (82,67")	2300 mm (90,55")
Height of tank shoulder [h]	700 mm (27,5")	735 mm (28,9")	950 mm (37,4")
Height of dome collar [hd]	315 mm (12,4")	315 mm (12,4")	315 mm (12,4")
Ø inlet [e]	650 mm (25,96")	650 mm (25,96")	650 mm (25,96")
Ø tank dome [d]	800 mm (31,49")	800 mm (31,49")	800 mm (31,49")
Weight approx.	80 kg	170 kg	240 kg
Pounds/lbS	176,36	374,77	529,1

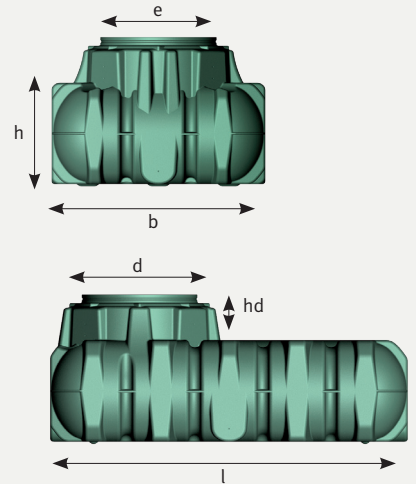

Tank only packages

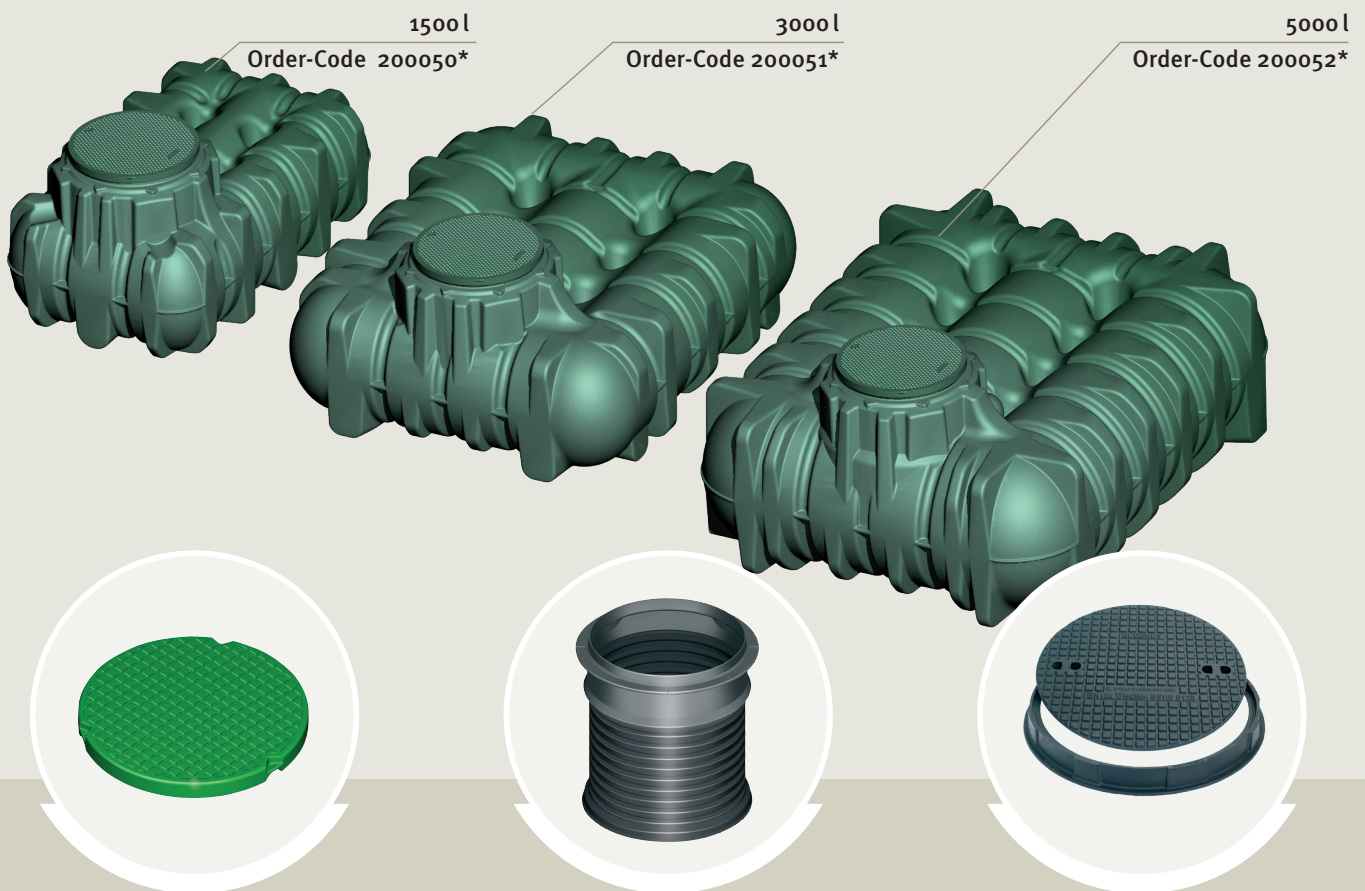

***Includes PE lid:**

PE lid double-walled
with childproof lock
Colour: grass green
Ø 70 cm

Accessory:

The perfect tank covering

The standard Li-Lo telescopic dome shaft can be telescoped and shortened in a continuously variable manner. Ø 60 cm, adjustable from 22-70 cm.

Order no. 202057


Accessory:

Car module

Class B125/DIN EN 124 (in combination with Li-Lo telescopic dome shaft), consisting of cast cover with a Ø of 69 cm and cast frame with a Ø of 78 cm.

Order no. 202059

Rainwater Harvesting with the Li-Lo underground tank

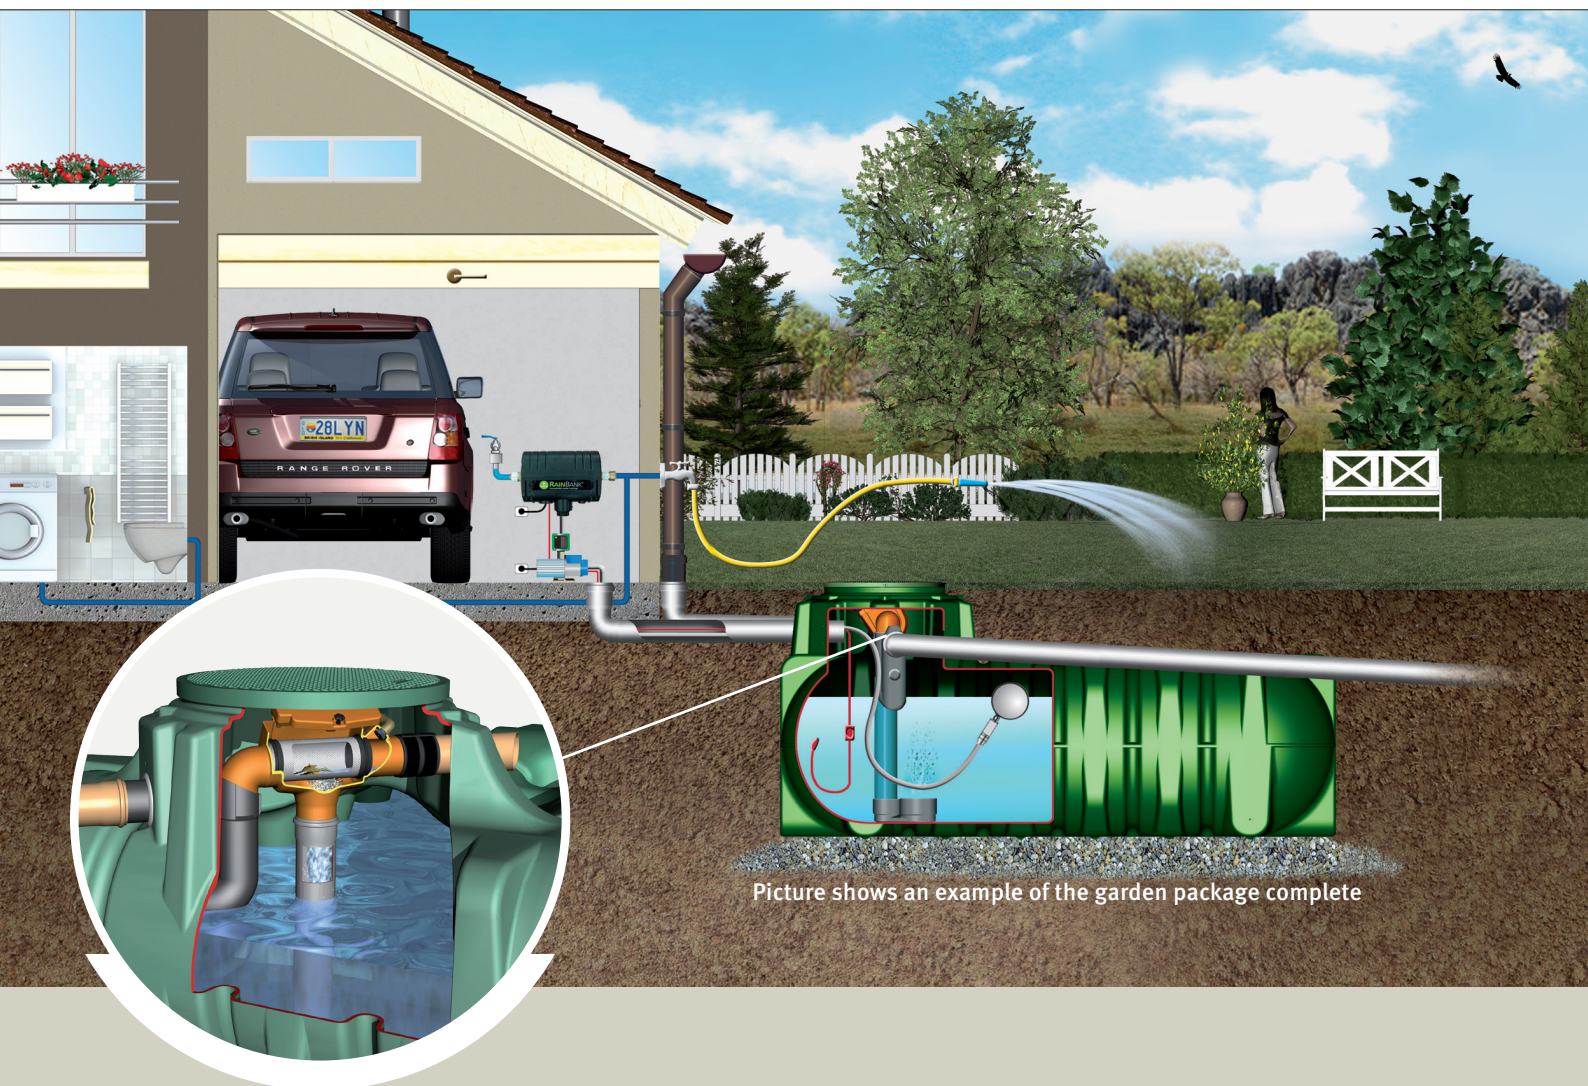

Picture shows an example of the garden package complete

SUPRA internal filter

- Provides over 95% water yield
- Self cleaning filter
- Space saving filter technology inside the tank
- Can manage roof areas up to 350 sqm
- Stainless steel filter insert 0.35 mm

Garden Tank and Filter Package

Scope of supply:

- Garden Tank, plus
- Supra Filter package (0.35 mm stainless steel mesh filter system-self cleaning)

Garden Package Complete

Scope of supply:

- Garden Tank and Filter Package, plus
- Stainless steel submersible pump and automatic rainwater controller (watermark approved)

Recommended by: