

RM1500-2 SUBMERSIBLE RAIN MAINS SYSTEM

EU SERIES



The Submersible system is assembled with a Multistage Pressure Pump and RM1500-2 changeover valve. Specifically designed for fast and easy installation, whilst supplying constant pressure and flow. The system is 100% European made, guaranteeing exceptional quality and performance in Rainwater supply applications. This system is suitable for underground tanks and best suited for supply to toilet, laundry and garden taps/outlets.

APPLICATIONS

- Rainwater System
- Irrigation
- Clean water transfer from tank and wells
- Construction
- Small Commercial Sites

FEATURES & BENEFITS

PUMP


- Automatic start and stop depending from demand of water by users.
- Integrated pressure controller with 220kPa/2.2 bar cut-in
- Supplied with 20m H07RN8F
- Integrated run-dry protection
- Valve blockage detection system
- Compact design
- Water-cooled motor
- Thermal overload protection

RM SYSTEM

- Rain to Mains Valve
- Integrated check valve, 100% Hydraulic
- Corrosion resistant
- Tested to AS4020 for potable water
- Watermark Certified componentry

CONSTRUCTION

- Stainless Steel AISI 304 Pump body, motor shaft, handle, cover, screen
- PPO Impellers, diffusers
- Alumina.Graphite, lubricated mechanical seal
- Nickel coated brass valve

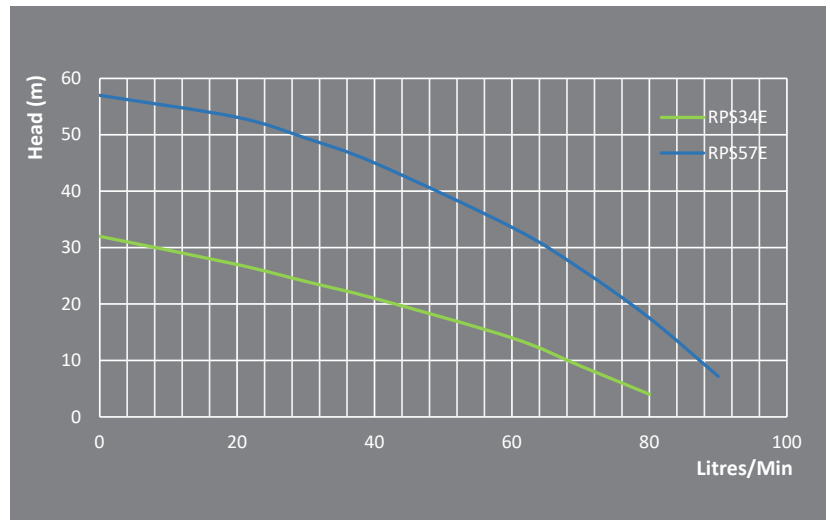

CODE	DESCRIPTION	POWER 240V			MAXIMUM		NO. OF IMPELLERS	CABLE LENGTH	SIZE Ø X H (MM)
		AMPS	P1 (W)	P2 (W)	FLOW (L/MIN)	HEAD (M)			
12895	RM1500-2 with REEFE® RPS34E Submersible Pressure Pump	3.8	850	370	80	32	3	10m	Ø127x502
12918	RM1500-2 with REEFE® RPS57E Submersible Pressure Pump	6	1250	750	90	57	5	10m	Ø127x610