

# RM1500 with PRJ Series

RM SYSTEMS

PRJ Series Premium Jet Pressure Pumps with RM1500 rains to mains changeover systems are designed for speed of installation with no cables, no float, no solenoid valve or additional electronic controls. This system stops mains supply while the rain water is being pumped, to help conserve our precious resource. When in mains status it provides full pressure and full flow with 25mm ports. 2 year in-field warranty on the pump, 5 year warranty on the RM1500 chrome plated brass valveset.

CODE	MODEL	POWER		RATED		MAXIMUM		WATER OUTLET NO. OF TAPS <sup>2</sup>	CABLE LENGTH	INLET	OUTLET	SIZE
		AMPS	WATTS	FLOW (L/min)	HEAD (m)	FLOW (L/min)	HEAD (m)					L x W x H (mm)
5118	PRJ062 w RM1500	2.5	370	25	20	62	35	4-6	3	25 FBSP	25 MBSP	365 x 170 x 375
5125	PRJ075 w RM1500	5	750	45	25	76	42	5-8	3	25 FBSP	25 MBSP	365 x 190 x 395
13236	PRJ095 w RM1500	6	1000	45	30	95	50	7-12	3	25 FBSP	25 MBSP	420 x 190 x 410

## APPLICATIONS

- Whole house supply up to 6 bathrooms
- Toilet blocks\*
- Garden Irrigation\*
- Ablutions blocks\*
- Hotels & motels\*
- Factories & warehouses\*
- Units & complexes\*
- Council parks irrigation\*


## FEATURES & BENEFITS

- This Rains to Mains switch over system allows mains water to flow if the tank water is unavailable, and stops mains flow when the pump is supplying rainwater
- Valveset is 100% hydraulic - no electronics
- Watermark certified
- Pressure Controller automatically checks for water every 24 hours after the tank is empty
- Run-dry protection and thermal overload switch

## CONSTRUCTION

- Stainless-steel Casing, Impeller and Shaft
- Carbon/Ceramic Mechanical Seal for reliability
- IP55 Motor with class F Insulation
- Quick plug Pressure Controller connection
- Noryl Jet and Venturi, Diffuser
- AS4020 Certification for Potable Water

\* Check specifications required.

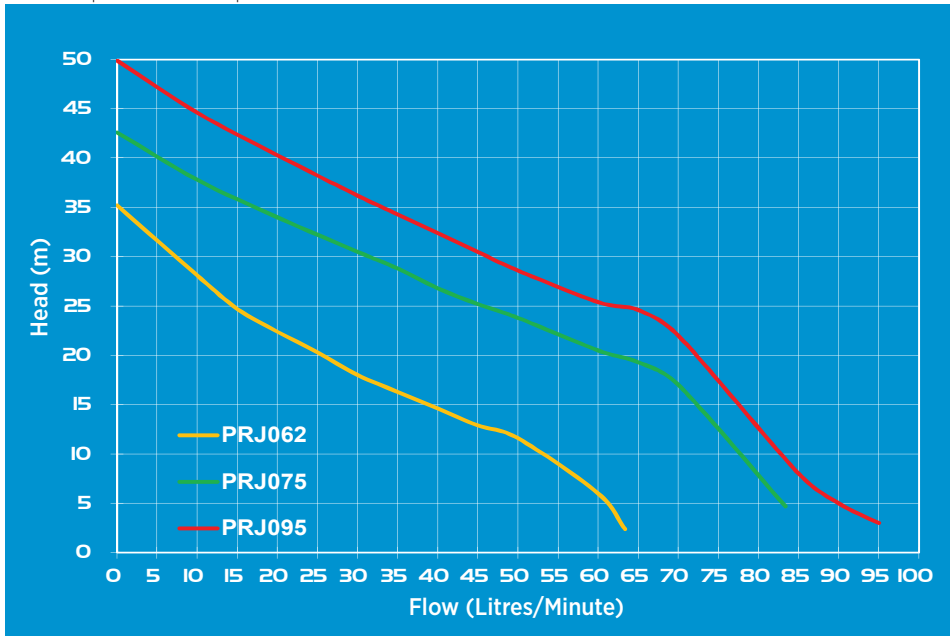

\*Size pump to suit circumstances

